




PRIZOR VIZTECH LIMITED

RP-POE0802-SF

8PORT POE SWITCH WITH
FULL GIGA AND SFP

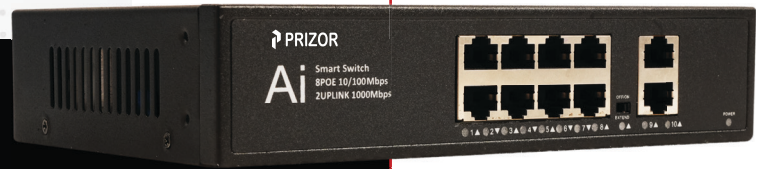

KEY FEATURES

- ◆ 8PORT 10/100/1000MBPS ETHERNET PORTS
- ◆ 2×10/100/1000MBPS UPLINK PORTS(RJ45) AND 1PORT SFP
- ◆ ALL 100MBPS PORTS SUPPORT POE
- ◆ POE COMPLIES WITH IEEE802.3AF/AT, UP TO 30W FOR SINGLE PORT
- ◆ UP TO 250M TRANSMISSION DISTANCE ON EXTEND MODE
- ◆ EASY TO USE, NO NEED TO CONFIGURE
- ◆ HIGH QUALITY WITH ALL METAL HOUSING
- ◆ SUPPORT LIGHTING PROTECTION 6000V



MULTIFUNCTION
SWITCH



LED
INDICATOR



LIGHTNING
PROTECTION



1800-123-3699



www.prizor.in





PRIZOR VIZTECH LIMITED

RP-POE0802-SF

8PORT POE SWITCH WITH
FULL GIGA AND SFP

SPECIFICATIONS

MODEL	RP-POE0802-SF
FEATURE	SPECIFICATION
POWER ADAPTER VOLTAGE	AC 110V-240V
CONSUMPTION	150W(52V 2.3A)
POE ETHERNET PORT	1-8 PORT:10/100/1000MBPS
ETHERNET PORT & SFP PORT	UPLINK PORT:10/100/100MBPS AND 1000MBPS SFP
TRANSMISSION DISTANCE	100MBPS:0-100M / 10MBPS:0-250M / UPLINK PORT:0-100M
TRANSMISSION MEDIUM	CAT5/5E/6 STANDARD NETWORK CABLE
NETWORK STANDARD	IEEE802.3/802.3U,IEEE802.3X,IEEE802.3AB
SWITCHING CAPACITY	5.6GBPS
PACKET BUFFER MEMORY	1MBITS
THROUGHPUT	5.1664MBPS
MAC TABLE	4K
PACKET FORWARDING RATE	10MBPS:14880PPS/PORT, 100MBPS:1488000PPS/PORT , 1000MBPS:1488000PPS
POE STANDARD	IEEE802.3AF/AT
POE POWER SUPPLY	1/2 +,3/6 -,8 CORE POWER SUPPLY
POE POWER	AF=15.4W,AT=30W FOR EACH PORT
PORT FUNCTION	POWER PRIORITY MECHANISM, FAST AND FORWARD, MAC AUTOMATIC LEARNING AND AGING IEEE802.3X FULL-DUPLEX AND MODE AND BACK PRESSURE FOR HALF-DUPLEX MODE
LED INDICATOR	LINK/ACT 100MBPS: POE STATUS INDICATOR, POWER INDICATOR, EXTENDER
WORKING TEMPERATURE	0°C~50°C
RELATIVE HUMIDITY	20-95%
STORAGE TEMPERATURE	-20°C~70°C



1800-123-3699



www.prizor.in

